



# PPEWARRIOR®

Infection, Prevention & Control

**1.800.425.0767**

HUMAN BODY INTELLIGENT TEMPERATURE MEASUREMENT PRODUCTS



# Model:CHT-018



## Intelligent Temperature Detector

Material: ABS Color:Black

Measured Temperature range: 32–43°C

Measurement distance: 0–10cm

High Temperature Alarm: Warning signs and red lights

Speaker Power: 1W

Charging interface: Micro USB

Charging voltahe: DC 5V

Battery voltage: 3.7V

Battery capacity: 2000mA

Working hours: >+30hours

Charging time: >+2.5hours

Response time: 0.5s

Measurement accuracy: +/- 0.2°C

Size: 120x70x34mm

Weight: 118g

## Intelligent temperature Detector



Doorbell mode

°C/°F  
Temperature Units

1s temperature measurement  
Non-contact temperature measure  
30 hours battery life  
Ai intelligent voice technology  
Milli second infrared sensor chip



Low body  
temperature



high body  
temperature



Wrist measurement



Test palm



Forehead measurement

## Anew generation of smart chips

Intelligent high-core  
accurate measurement  
Excellent temperature  
recognition performance



Switch between two modes

Infrared temperature measurement mode



Doorbell mode



Temperature measurement mode

## productfunction diagram



## product parameters



## Built-in 2000mAh lithium battery

charging through micro USB interface, battery life up to 50 hours

**2000mAh**  
High capacity

**50H**  
Battery life

**≤2.5H**  
Charging time



## Product Packaging



# Model : K9



**Accuracy:  $\pm 0.2$  degrees**

**Screen: Digital display**

**Charging method: USB charging or  
18650 Li-Battery**

**Input: USB DC 5V**

**Response time: 0.5–1s**

**Measuring range: 0 ~ 50 °C**

**Standby: 5s (red dot dynamic cycle)**

**\*High Accuracy ( $\pm 2^{\circ}\text{C}$ )**

**\*Support Fahrenheit and Celsius**

**\*Quick measurement (New chip)**

**\*Sensitive distance sensor**

**\*Automatic standby and shutdown state**

## Sterilization is more effective K9 Automatic Temperature Measurement & Disinfection Machine

Safer without contact



Large-capacity



Automatic dispensing



Temperature measurement



Alarm Function



High precision



° C/° F



## Automatic temperature measurement and disinfection Effectively avoid cross infection

Align the temperature measuring probe and the liquid outlet  
with the palm of your hand to detect the temperature and  
automatically sterilize the liquid

Extremely fast temperature  
measurement

Infrared sensor



Extremely fast temperature  
measurement



Infrared sensor



° C/° F temperature unit can be selected

Switch easily

36.7°C

98.7°F



Infrared temperature probe

Outlet

Photosensitive distance sensor



Tripod mounting hole

## Box Contents



K9

Intelligent Sensor Soap Dispenser



K9

User Guide



USB cable & charger\*1



Screw & rubber plug\*2

## Strong Environmental Adaptability



Hospital



School



Community



Factory



Supermarket



Station



Hotel



Exhibition



Market

# Model:UFR118



Screen:Digital display

Accuracy:  $\pm 0.2$  degrees

Response time:0.5s

Abnormal automatic alarm:flashing+"Di Di" sound

Automatic measurement:measuring distance 5cm~ 10cm

Charging method:USB charging or battery

Input:USB DC4.2-5V

Infrared measuring range:0° ~50°

Weight:242g

## NON-CONTACT INFRARED FOREHEAD THERMOMETER

FAST / BIG SCREEN / MULTIFUNCTION



Quick Measurement



Acoustic Alarm



No-Contact




Unit switchable



Type-C




High accuracy

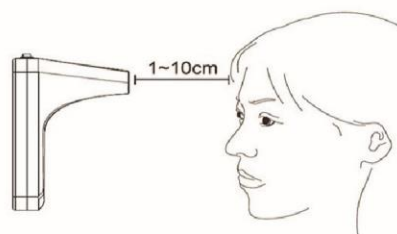


With normal readings  
the LED is green  
( $<37.5^{\circ}\text{C}/99.5^{\circ}\text{F}$ )

A red LED indicates  
a fever  
( $\geq 37.5^{\circ}\text{C}/99.5^{\circ}\text{F}$ )

## PRODUCT DETAILS

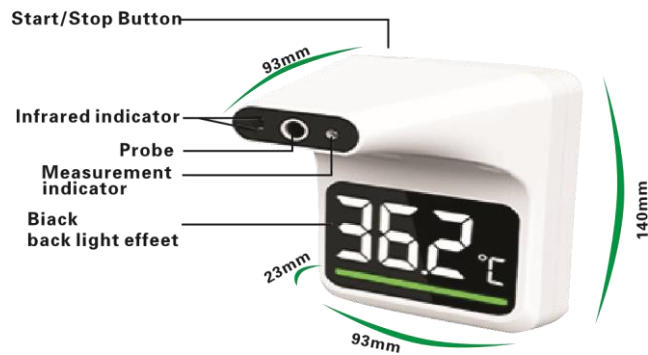

## TEMPERATURE MEASUREMENT IN ONE SECOND



Fast measurement in 1 second,  
to make safer



Fengyo Yukaku combination design,  
external appearance excellence.



## TEMPERATURE MEASUREMENT IN ONE SECOND



Fast measurement in 1 second,  
to make safer



# Model:RL-A8



## AI Thermometer

Display resolution :0.1 degrees

Body temperature mode:  $\pm 0.3$  degrees

Measuring range :32-42.9 degrees

Screen light status: Red/green/orange

Supported languages:Customize-able global languages

Infrared laser sensor :supports adjustable distance

Measuring time :2S

Measuring distance: 8~15cm

Power Supply :type C 5V/1A

1.CPU: ST From Germany

2.High temperature voice alarm: support

3.Supported languages: global languages

4.Measuring range: 32-42.9 °C

5.Measuring distance: 8-15CM

6.Screen light status: red / green / orange

7.Power supply: USB 5V / 1A

8.Standby power consumption: 50MW

9.Infrared laser sensor: supports adjustable distance

10.Temperature unit support: °C / °F

11.Infrared temperature sensor: high-performance temperature sensor

12.Temperature storage memory: 20 sets of data

## AI Doorbell Guard

(with human body temperature detect)

Wrist and forehead non-touch  
Automatic temperature detect



Office space

**Features:**

1. 2 Seconds detect time
2. Hi-precision 0.3 DEVIATION
3. AUTO Alarm
4. LOW power consumption
5. Fahrenheit & celsius unit switchale
6. Backlight screen
7. Automatic Non-touch
8. Inside Roomdeployment
9. 7x24 Hours Working

### key features

2S

2 seconds  
detect time

Hi.precision  
0.2c deviation

Auto Alarm

Low power  
consumption

Types format

Backlight screen



### Technical Data Sheet

CPU	STM SoC, 16bit	Speaker	60 dB max, Voice supports
Object distance	15CM	Detect time	2 seconds
Sensor type	Infrared+Thermal sensors	Precision	$\pm 0.2^{\circ}\text{C}$
Detect range	32 to 42.9 °C	Detector distance	8-15CM.(Adjustable)
Backlight color	Red/Green/Orange	Power supply	USB 5V/1A
Display language	EN/Multi-languages	Standby power	50 mWatt

**SIMPLY > FASTER > PRECISELY > 7x24H**




# Specifications



CPU	ST	speaker	2w
Measuring distance	15CM	Detection time	2s
Sensor type	Infrared detector	Precision	±0.3C
Human detection area	32° C to 42.9C	Power supply	5V/1A
Backlight color	Red/Green/orange	language	English / multilingual

# Appearance Introduction

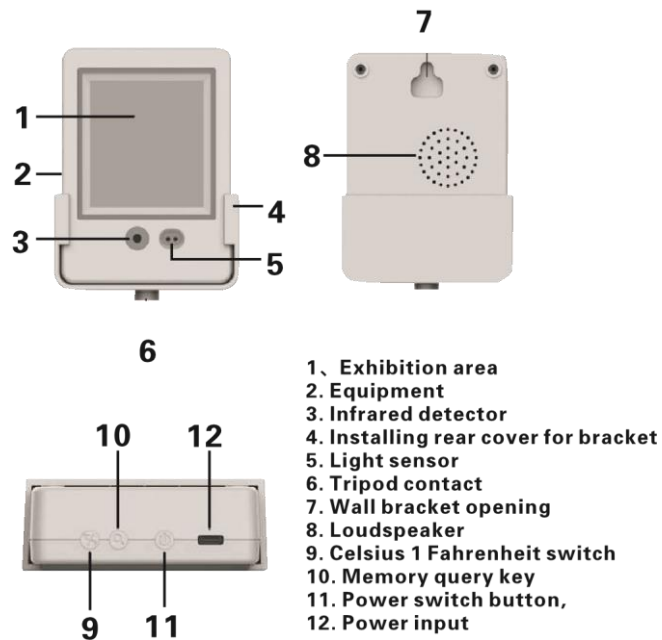

## Intelligent infrared thermometer

Support wrist and forehead temperature measurement; 15cm automatic detection




A new intelligent infrared thermometer



## A wide range of practical places

15cm automatic detection

Applicable to schools, offices, buses, vehicles, supermarkets, parking  
Parking lot, community entrance and exit and other environments.  
There are two installation methods: wall mounted and bracket mounted

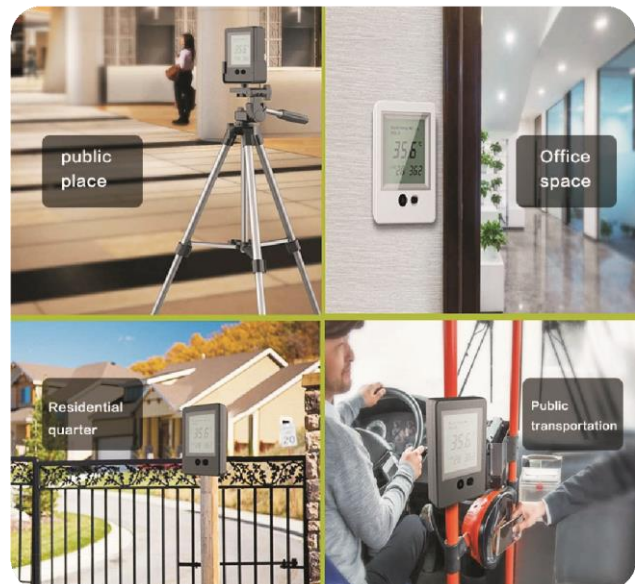


Model:KD-A8



CPU	ST microelectronics
Display resolution	0.1 degrees
Accuracy	Body temperature mode: +−0.3 degrees
Measuring range	32– 42.9 degrees
Screen light statues	Red/Green/Orange
Supported Language	Customize able global language
Infrared Laser sensor	Support adjustable distance
Infrared temperature sensor	High performance temperature sensor
Infrared temperature sensor	
Motion detection measurement	Support
High temperature alarm	Support
Measuring time	2S
Energy saving and environmental protection	Turn off the screen automatically
Measuring distance	8–15 cm
Power supply	Type C 5V/1A
Standbypower consumption	50mw
Temperature unit	Celsius/Fahrenheit
Temperature storage memory	20 sets of data
Working environment temperature	10–35 degrees
Products size	L80*W110*H25 mm
Packing size	L115*W145*H70 mm



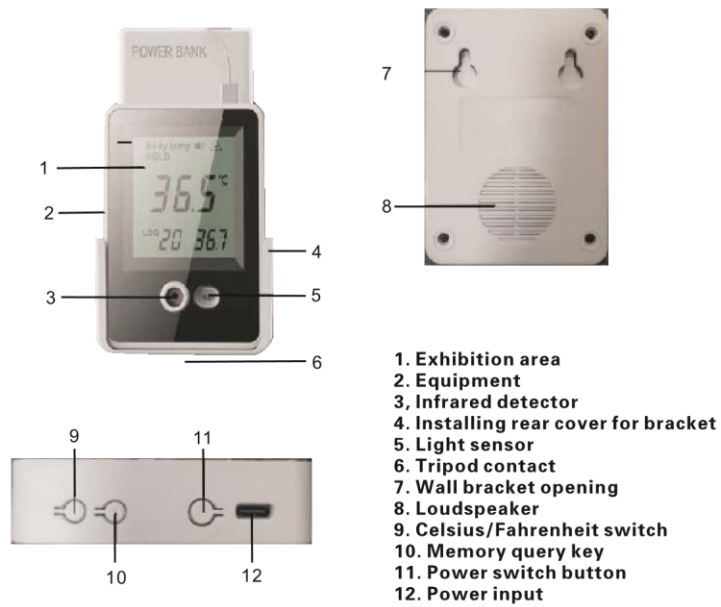



## Model:JS-TM01



Intelligent Detector

Measurement Method: Non-Contact

Memory array: 32 Units

Measurement Site: Forehead

Powerwaste: Watwork  $\leq 1.33\text{mA}$ /Shutting down  $\leq 15\text{W}$

Measuring Distance: 0-10cm

Measuring Range: Body:  $32^{\circ}\text{C}$ - $42.9^{\circ}\text{C}$

Power : supply mode DC5V/1A

Max.allowable error :  $\pm 0.2^{\circ}\text{C}$

Size: 110x 80x27mm

Pattern:  $^{\circ}\text{C}/^{\circ}\text{F}$

Weight: 0.124kg

Screensize: 3in

Backlight color:Green/Orange/Red

### HIGH TEMPERATURE WARNING

When a high temperature is detected,  
the screen displays red and a loud alarm sounds

Normal temperature

Abnormal temperature

Fever and fever



No alarm

Green  
 $34^{\circ}\text{C} - 37.3^{\circ}\text{C}$



Alert

Orange  
 $37.4^{\circ}\text{C} - 38^{\circ}\text{C}$



Alert

Red  
 $T \geq 38.1^{\circ}\text{C}$

### INTEGRATED INFRARED PROBE

Strict factory calibration to ensure more accurate measurement

ACCURACY :  $\pm 0.2^{\circ}\text{C}$






# INTELLIGENT DERECTOR




## FUNCTIONAL FEATURES

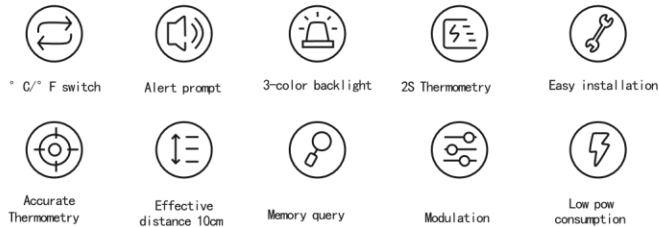


If you are not sure whether it is what you need [click](#) [GO](#)

## PRODUCT DESCRIPTION

- 1 Host screen
- 1 Light sensor
- 1 Infrared detector
- 1 Screw fixing hole
- 1 Horn hole
- 1 Sound reduction
- 1 Sound amplification
- 1 Memory query
- 1 Mode switching
- 1 10 Power Supply

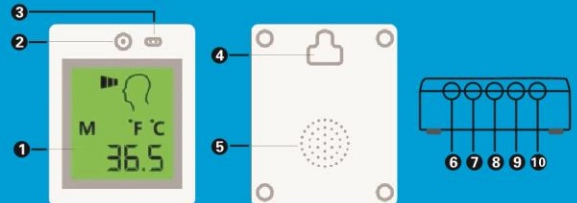

## DISPLAY DESCRIPTION

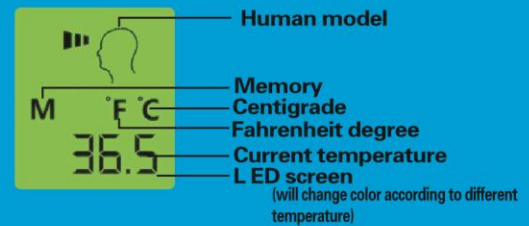


## MATTERS NEEDING ATTENTION

- .Do not touch the glass infrared with your fingers.
- .The ambient temperature of this product must be 10° C- 40° C.
- .The product must be kept clean and in a dry place.
- .DO not drop the product. The glass protecting the lens is the most fragile part.
- .Please do not place this product where there is a motor.
- .DO not place the product in extreme temperature environment; .above 50° C or below -20° C.

## PRODUCT PARAMETERS

Display	3-inch LCD
Memory storage	32 Groups
Power supply	DC5V/1A
Low power prompt	≤2.5V
Horn	8Q 1W
Service conditions	Ambient temperature: 10° C- 40° C Relative humidity: ≤80%
Measuring distance	0- 10cm ( customizable)
Body temperature mode	32° C-42.9° C±0.2° C
Accuracy	±0.2° C
Temperature unit	° C/° F
Backlight display	Green,orange,red
Power waste	Shutdown status≤1.33mA working status≤1.5W
Working current	Working current 20- 250mA Standby 10mA/shutdown 1.33mA
Product material	ABS material
Colour	Black/Grey
Outline ruler	110* 80*27mm
Bare weight	0.124kg
Box size	155* 140* 45mm
Compliance with standards	EN60601-1 EN12470-5 ASTM1965-98 CE ROHS

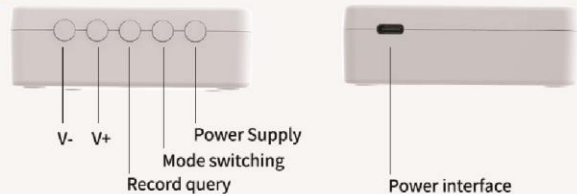

## Packing



# Model: YAD-001



## Automatic Hand Sanitizer Dispensers

Material: ABS + PC

Power: 3W

Power supply: DC 5V 2.1A or 4 AA batteries (not included)

Function: Detect body temperature and disinfect hands by sensor-supported sanitizer

Temperature display: Digital display and voice broadcast

Measurement method: Infrared sensor

Measuring distance: 1-5cm

Measuring range: Body temperature (32 degree C - 42.9 degree C, 89.6 degree F - 109.2 degree F)

Allowable error: +/- 0.2 degree C

Measurement time: 2 seconds

Filling bottle capacity: 300ML

Liquid type: Washing-free hands sanitizer, common hands sanitizer

Discharge method: Infrared sensor

Size: 128x70x300mm

Weight: 670g





## Hanging installation



**Model:TYH-001**

## SUITABLE FOR ALL OF PUBLIC PLACE





**Model code: TYH-001**

**Color: White/ Pink**

**Material: ABS/PC**

**Size: 2.5\*10.7\*27.5cm**

**Volume: 1 200ML**

**Installation: wall mounted .**

**Working temperature: 3° C-40° C**

**Sensing distance: 5cm**

**Power supply mode: USB Charge/  
Lithium battery +USB Charge**

**Automatic induction  
spray disinfection**

**No holing installation**

**3 years warranty**

**Free of punching  
Transparent screw stick**








**Model:K3Pro**

### Compatible with a variety of venues

Hotel/KTV/Bar/Hotel/Restaurant/School/Public  
Toilet/Restaurant/Office/Office/Home  
Bathroom/4s Shop/Mall, etc.



Hotel



Gym



Medical institutions



station



office building



shopping malls



Hotels/Hotels



shopping malls/restaurant



School/Hospital



public places

# Advantages

## Forehead Infrared thermometer



Quick measurement



High Accuracy



Alarm Function



One Weeks tandby



°C/F Unit Available



Energy saving



### Technical Data

Method of measurement	Sensitivity sensor distance sensor	Operating mode	Surface mode /body mode /Count mode
Temperature Unit	°C/°F	Surface temperature measurement range	10-50°C
Accuracy	±0.2 (34-45°C)	Range of Body Mode temperature	35 - 42°C
Measuring distance	5~ 10 cm	Environment temperature	10- 40°C
Display	2.8 inch LCD screen	Counting capacity	9999 times
Install Method	Nail hook/bracket fixing	Record temperature data	Support to review 30 sets of data
Power supply	USB /4 AA batteries	Alarm Function	Flash+sound alarm for about 10 seconds
Response time	0.5s	10 signal output	Support(switch signal / pulse signal)
Working band	5um	Body storage <input checked="" type="checkbox"/>	Connect to the computer <input checked="" type="checkbox"/>
Standby time	30s	Volume setting <input checked="" type="checkbox"/>	Voice broadcast <input checked="" type="checkbox"/>
Product Size	170*115*140mm	Backlight switch <input checked="" type="checkbox"/>	Automatic shut-down <input checked="" type="checkbox"/>
Net weight	303g	Upper alarmlimit <input checked="" type="checkbox"/>	Whether to support charging <input checked="" type="checkbox"/>

Quick measurement

Accurate feedback

Feveratarm

K3Pro

# K3Pro Infrared Thermometer

Quick and accurate

- ✓ HD LCD screen
- ✓ Alarm Function
- ✓ Data Record



## POWER SUPPLY

Can be connected to USB power supply, charging treasure, 4AA batteries




Quick

## 0.1S QUICK TEST

Highly precision infrared thermometer, the temperature can be measured in 0.1s

## INTRODUCTION

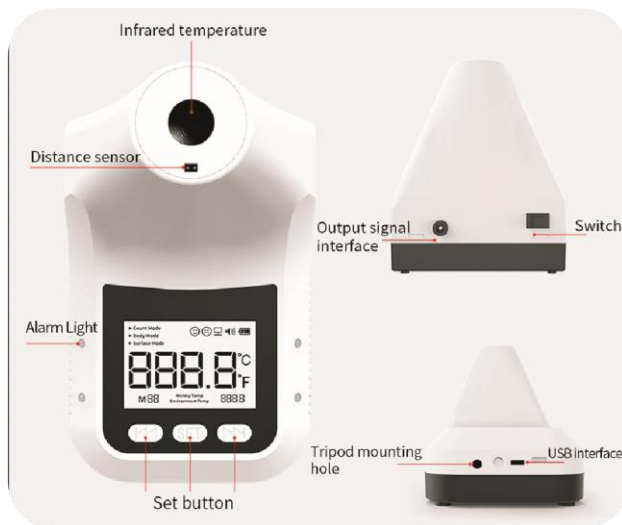

## Technical Data

Method of measurement	Sensitivity sensor distance sensor	Operating mode	Surface mode/body mode/Count mode
Temperature Unit	°C/°F	Surface temperature measurement range	10~50°C
Accuracy	±0.2 (34~45°C)	Range of Body Mode temperature	35~42°C
Measuring distance	5~10 cm	Environment temperature	10~40°C
Display	2.8 inch LCD screen	Counting capacity	9999 times
Install Method	Nail hook/bracket fixing	Record temperature data	Support to review 30 sets of data
Power supply	USB/4 AA batteries	Alarm Function	Flash+sound alarm for about 10 seconds
Response time	0.5s	10 signal output	Support (switch signal / pulse signal)
Working band	5um	Body storage	<input checked="" type="checkbox"/>
Standby time	30s	Connect to the computer	<input checked="" type="checkbox"/>
Product Size	170*115*140mm	Volume setting	<input checked="" type="checkbox"/>
Net weight	303g	Voice broadcast	<input checked="" type="checkbox"/>
		Backlight switch	<input checked="" type="checkbox"/>
		Automatic shut-down	<input checked="" type="checkbox"/>
		Upper alarm limit	<input checked="" type="checkbox"/>
		Whether to support charging	<input checked="" type="checkbox"/>

# Model: K3



1. Product Name: Non-contact infrared rapid thermometer
2. Measurement method: without contact on the forehead
3. Temperature Mode: °C or °F
4. Accuracy:  $\pm 0.2$  (34 ~ 45 °C)
5. Automatic alarm for abnormal temperature: red light flashes, continuous alarm 'Di' sound
6. Distance: 5 ~ 10 cm
7. Charging method: USB or lithium battery (18650 Li-ion)
8. Placement method: nail hook / double-sided adhesive sticking / bracket fixing
9. Display: digital display
10. Measuring temperature: 0 ~ 80 °C
11. Environment temperature: 5 ~ 45 °C
12. Response time: 500 ms
13. Working wave: 5 microns
14. Standby: 5 s
15. Net weight: 350g (excluding lithium battery)
16. Gross weight: 500g

K3

## Infrared thermometer Forehead

### Advantages



Quick measurement



High Accuracy



Alarm Function



One Week standby



°C/°F Unit Available



Energy saving



### Appearance



## Technical Data

Accuracy	0.2 degrees	Response time	0.5s
Abnormal automatic	flashing + "Di Dr sound	Charging method	USB charging battery
Automatic measurement	measurement 5cm ~ 10cm	Input	USB DC 5V
Standby	About one week	Weight	350g
Install method	Nail hook, double-sided adhesive sticking, bracket fixing	Dimensions	170*115* 140mm
Operating temperature	10 ~40 °C ( Recommend 15 ~35 °C)	Infrared measuring arrange	0~50°C
Standby	5s (Red dot dynamic cycle)	Screen	Digital display




## Technical Data

Method of measurement	Sensitivity sensor distance sensor	Operating mode	Surface mode /body mode /Count mode
Temperature Unit	°C/°F	Surface temperature measurement range	10~50°C
Accuracy	±0.2 (34~45°C)	Range of Body Mode temperature	35 - 42°C
Measuring distance	5~ 10 cm	Environment temperature	10~ 40°C
Display	2.8 inch LCD screen	Counting capacity	9999 times
Install Method	Nail hook/bracket fixing	Record temperature data	Support to review 30 sets of data
Power supply	USB /4 AA batteries	Alarm Function	Flash+sound alarm for about 10 seconds
Response time	0.5s	10 signal output	Support (switch signal / pulse signal)
Working band	5um	Body storage <input checked="" type="checkbox"/>	Connect to the computer <input checked="" type="checkbox"/>
Standby time	30s	Volume setting <input checked="" type="checkbox"/>	Voice broadcast <input checked="" type="checkbox"/>
Product Size	170*115*140mm	Backlight switch <input checked="" type="checkbox"/>	Automatic shut-down <input checked="" type="checkbox"/>
Net weight	303g	Upper alarm limit <input checked="" type="checkbox"/>	Whether to support charging <input checked="" type="checkbox"/>

## Install method



Nailhook





Double-side tape sticking



Bracket fixing

## Introduction

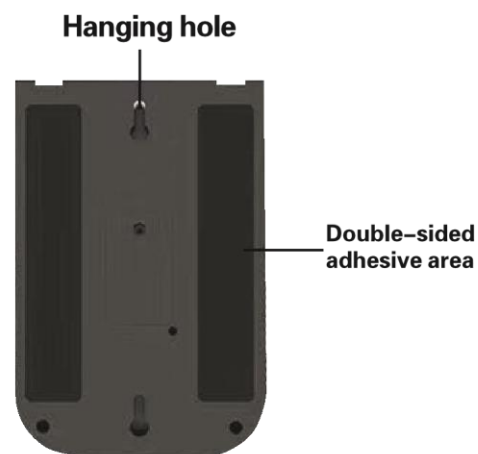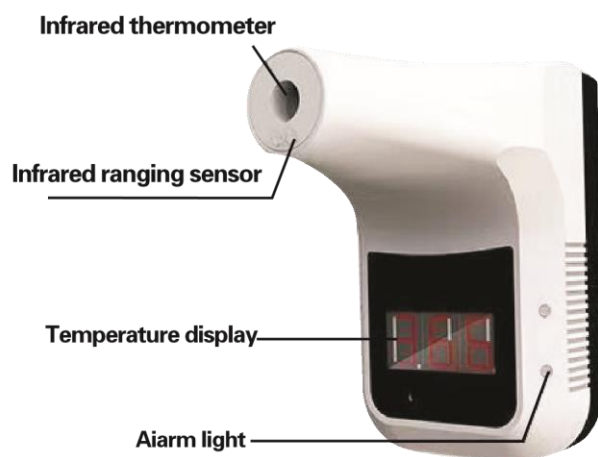

# Model:M3



M3 Wall-Mounted touch-less infrared thermometer

Measurement accuracy:  $\pm 0.2^{\circ}\text{C}$

Response time: 0.5s

Measuring distance: 5cm – 10cm

Infrared measuring range:  $0-50^{\circ}\text{C}$

Operating temperature:  $10^{\circ}\text{C}-40^{\circ}\text{C}$  ( Recommend )

Dimensions: 170\*115\*140mm

Net weight: 350g

Screen: Digital display

Install Method: Wall-Mounted / Bracket/double-sided adhesive tape


Abnormal automatic: red light flashing+ "di di" Sound

Charging method: USB charging or battery


Input: USB DC 4.2-5V

Standby: About one week

Standby: 5S (Red dot dynamic cycle)

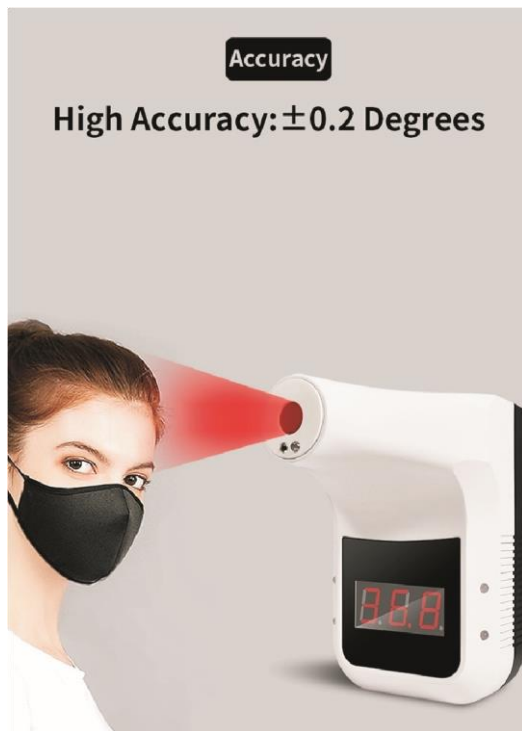

## ADVANCED INFRARED THERMOMETER

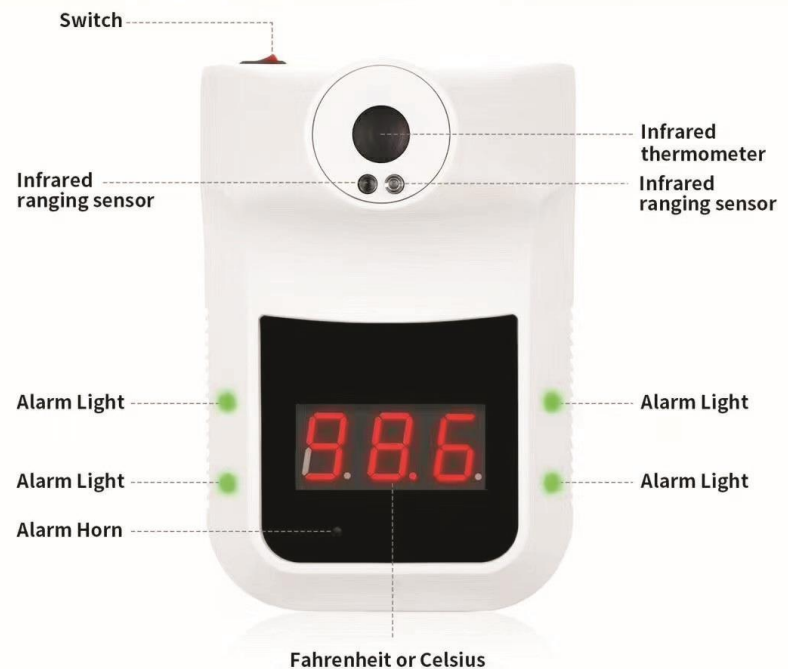

Rapid Testing

High Accuracy

Alarm Function

Energy saving

°C/°F Unit Available




UPGRADED INFRARED THERMOMETER

## Install Method




Nail hook



Double-sided adhesive sticking



Bracket fixing



## MULTIPURPOSE MEASUREMENT

Infrared thermometer can be installed in crowded areas, such as: railway stations, bus stations, hospitals, schools, etc.



Model:TYH-002



## Face Recognition Body Temperature Camera Thermometer

Power adapter:12 V 3 A power supply (DC head for DC 5.5 mm universal standard interface)

Outer size:190(L) x90(W) x 26(D) mm

Weight:0.5kg

Ambient temperature:-20°C—50°C

Relative humidity:10%—85%

Storage capacity:1000000 traffic records, 3000 faces, 3000 palm prints ,  
3000 passwords(Features that can only be customized by customers)

Speed of recognition:≤0.5S

FRR:<0.01%

FAR:<0.001%

Communication mode:U-disk,TCP/IP(Features that can only be customized by customers)

Wegan signal:Wegan output, can be used as a read head

Keyboard:Touch screen



### Face recognition temperature measuring device

Body temperature test

Mask recognition

Face recognition

Access control attendance

### Live detection, reject photos and videos

Efficient and safe, the accuracy rate of face recognition is > 99%, and can be recognized normally without taking off the mask, avoid the risk of infection.

### Large-capacity storage

1000000  
pass records

5000  
faces

5000  
passwords





## Palmprint recognition, U disk attendance

Non-contact palm print recognition, you can check attendance by waving your hand;  
U-disk time attendance, one-click import data.



USB interface



Both the access control machine and the time attendance machine, inserting U-disk to generate reports automatically, the operation is simple and efficient.



## APPLICATION



AIRPORT



OFFICE BUILDING



HIGH SPEED RAIL



CONSTRUCTION SITE



HOTEL



MALL



COMMUNITY



SCHOOL



HOSPITAL



BANK



GYM



GOVERNMENT

# Model:K5



## K5 Automatic Thermometer

Item: Automatic Thermometer K5

Source category: Spot

Appearance size: 170\*110\*33MM

Product weight: 180g

Applicable people: general type

Wearing method: Wall-mounted automatic fast thermometer

Applicable system: Automatic thermometer Compatible platforms

Additional function: 1/4 interface

Measuring distance: 5cm~10cm

Supply: USB DC 4.2~5V and 7# battery

Standby: About one week

Measuring Range: 0~50° C

Standby: 5s (Red dot dynamic cycle)

Charging method: USB charging or battery

Operating temperature: 10° C~40° C (Recommend 15° C~35° C)

## Advantages

### Infrared thermometer Forehead



Quick measurement



High Accuracy



Alarm Function



voice Broadcast



°C/F Unit Available



Energy saving



## Technical Data

Accuracy	±0.2 degrees	Response time	0.5s
Abnormal automatic alarm	flashing + "Di Di" sound	Charging method	USB charging or battery
Automatic measuring	measuring distance 5cm ~ 10cm	Input	USB DC 5V
Standby	About one week	Weight	350g
Install method	nail hook, double-sided adhesive sticking, bracket fixing	Dimensions	170*115*140mm
Operating temperature	10C~40C (Recommend 15C~35C)	Infrared measuring range	0~50°C
Standby	5s (Red dot dynamic cycle)	Screen	Digital display

Quick measurement

Accurate feedback

Fever alarm



## THREE-COLOR BACKLIGHT DISPLAY

Three-color backlight design, timely judgment of body temperature, intelligent alarm

...



Normal body temperature

No alarm sound

FEVER

Send out a warning

FEVER

Send out a warning

## DATA MEMORY FUNCTION

100 sets of data records, comparing multiple temperature dataRecord the body temperature changes



## FLEXIBLE INSTALLATION

MOVABLE TO DIFFRENT PLACES



1/4 screw buckle with tripod



Screw holes

## Intelligent temperature measurement safety protection

Raise hand automatic identification detection fast and reliable



### Traditional handheld temperature measurement

Low efficiency and slow travel  
Easy to gather and easy to infect  
Low precision, inaccurate



### INTELLIGENT AUTOMATIC TEMPERATURE MEASUREMENT

Pass quickly, high efficiency  
Non-contact temperature measurement, not easy to infect  
Smart chip, high precision



# Model:K7



Non-contact wall mounted infrared thermometer

Accuracy:  $\pm 0.2$  degrees

Abnormal automatic alarm: flashing + "Di Di" sound

Automatic measurement: measuring distance 5cm ~ 10cm

Standby: About one week

Install method: nail hook, double-sided adhesive sticking, bracket fixing

Operating temperature: 10°C~40°C (Recommend 15°C~35°C)

Standby: 5s (Red dot dynamic cycle)

Response time: 0.5s

Charging method: USB charging or battery

Input: USB DC 4.2~5V

Infrared measuring range: 0~50 °C

Screen: Digital display



## Packing





1S

Rapid Testing

±0.2

High Accuracy



Alarm Function



Energy saving

°C/°F

°C/°F Unit Available



Long standby time

Automatic standby energy saving when not in use



Three power supply mode  
is more convenient to use



Battery



Power USB socket



power bank

The state of charging indicator light is red and green, and the red light flashes when the power is insufficient

## Install Method



Matching bracket



Desktop



Wall hanging



Viscose



screen: 3.5 inches

**A31** (130 × 110 × 58 mm)

## Specification

Measurement method: Oscillometric method

Measuring range: Static pressure: 0~290mmHg, 0~38.66kPa

Pulse: 40~180 beats/min

Accuracy: Static pressure:  $\pm 3\text{mmHg}(\pm 0.4\text{kPa})$ ; Pulse:  $\pm 5\%$ 

## Optional

Battery: ☐ DC 6V, 4×AA battery  
☐ DC 3.7V, lithium battery

Backlight: ☐ 3 colors Backlight ☐ ☐ ☐  
☐ 1 colors Backlight ☐ ☐ ☐  
☐ No Backlight

Voice broadcast: ☐ Custom voice ☐ No sound



2x99 Memory  
Storage



Intelligent  
Pressure



3 Average  
Result



Micro-USB  
Power source



WHO  
Standards

# BSX976

## Specification

Temperature units:

Celsius temperature( $^{\circ}\text{C}$ )/( $^{\circ}\text{F}$ ), can be set

Measuring range:

Human body: ( $32.0\sim42.9^{\circ}\text{C}$ )/( $89.6\sim109.2^{\circ}\text{F}$ )

Object: ( $0\sim118^{\circ}\text{C}$ )/( $32\sim244.4^{\circ}\text{F}$ )

Accuracy: Human body: ( $35\sim42^{\circ}\text{C}$ )

Outside  $\pm0.3^{\circ}\text{C}/\pm0.54^{\circ}\text{F}$  ( $35\sim42^{\circ}\text{C}$ ) Within  $\pm0.2^{\circ}\text{C}/\pm0.4^{\circ}\text{F}$

Object:  $\pm1.0^{\circ}\text{C}/\pm1.9^{\circ}\text{F}$



Forehead



One second  
measurement



Memory  
storage



Automatic  
shutdown

Hot!  
new  
design  
Fashion  
Acrylic



## Q2

### Function

Easy-to-read colour display

Pulse curve display

Perfusion Index

diseases, bronchial asthma

suitable for sports at high altitudes

(e.g. mountaineering, skiing and aviation sports)

Particularly suitable for persons with: Heart failure,  
chronic obstructive pulmonary



Perfusion  
Index



HR+SpO2



High definition  
color OLED



One-touch  
Operation



Automatic  
shutdown

## Digital & Infrared Thermomete

## Ear & Forehead Thermometer >>

Model: E122



- Forehead Thermometer
- Workable for both object and body
- Fast 1 second instant measurement




## Forehead infrared Thermometer >>

Model: E127 ( Bluetooth version )



- No contact measurement for body and object temperature
- Fast 1 second instant measurement
- Easy to operate
- LED display
- Power Source: 3.7v Rechargeable Lithium Battery
- Bluetooth Transmission: Optional

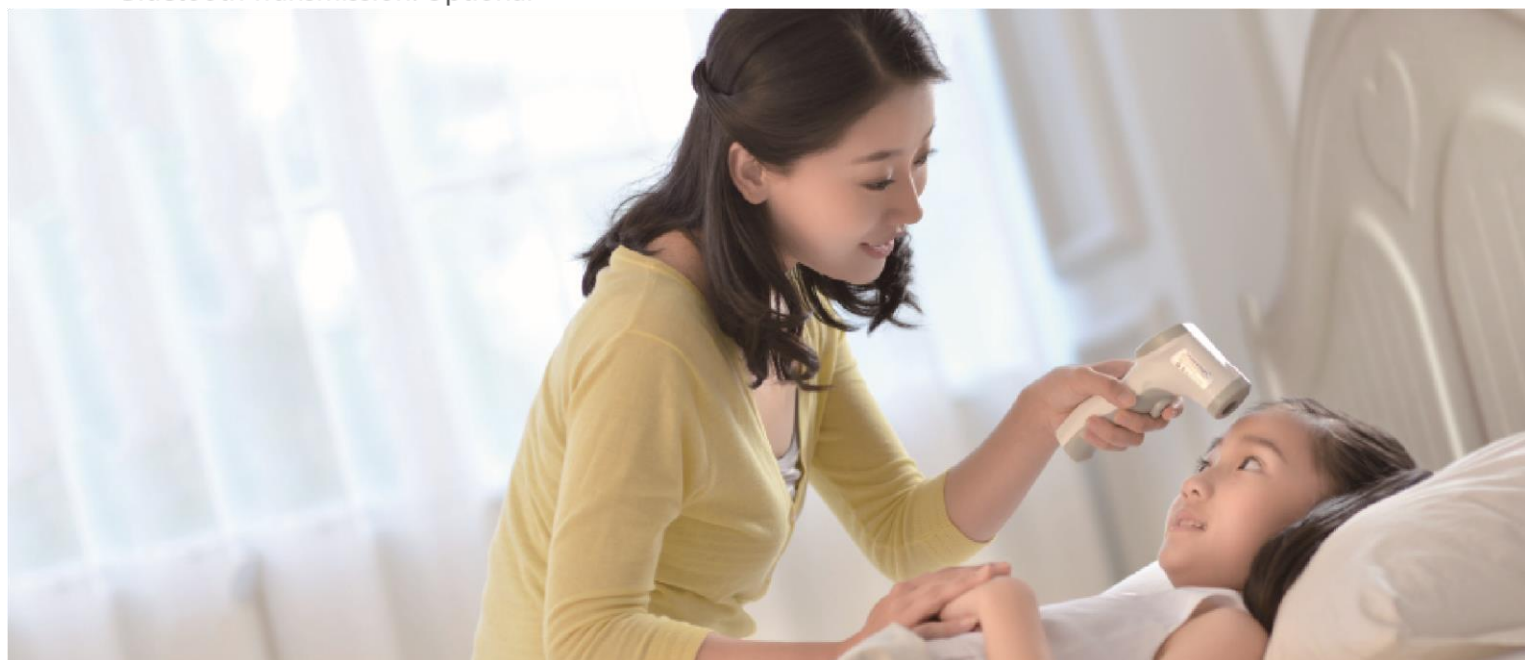



# Thermometer >>

## Model: T103

- Flexible Tip, water proof
- 60 seconds measurement



## Model: T104

- Rigid Tip, Water proof
- 60 seconds measurement

